

S-2000



DISPLAY ON THE REAR SIDE


FEATURES

- CONDUCTIVE SILICONE RUBBER SWITCH WITH SOFT TOUCH.
- EASY-TO-READ VACUUM FLUORESCENT DISPLAY.
- STAINLESS STEEL PLATTER WITH DRAINAGE WILL KEEP THE MACHINE CLEAN.
- AUTO-SPAN ADJUSTMENT, AUTO-ZERO TRACKING.
- FUNCTIONS OF ZERO, TARE, TARE SAVE, PREPACK
- INDIRECT MEMORY BACK-UP UP TO 800 ITEMS.
- 1/2LB AND 1/4LB PRICE MULTIPLIER FEATURES, WHERE ALLOWED IN THE U.S.A.
- RS-232C OUTPUT OPTION.
- MEETS OR EXCEEDS THE REQUIREMENT OF NBS HANDBOOK 44.
- OPTIONS : FISH PAN

SPECIFICATIONS

CAPACITY	30lb × 0.01lb
DISPLAY	WEIGHT, UNIT PRICE, TOTAL PRICE
MEASUREMENT TYPE	LOAD CELL
OPERATING TEMPERATURE	-10°C ~ 40°C (14°F ~ 104°F)
MAX. TARE WEIGHT	-30.00lb
PLATTER SIZE (W × D × H)	372 × 278 × 25mm 14.6 × 11 × 1 in
POWER SUPPLY	115/220V, 240V, 50/60Hz
SHIPPING DIMENSIONS	598 × 440 × 275mm 23.5 × 17.3 × 10.8 in
SHIPPING WEIGHT	17.2lb

DIMENSIONS

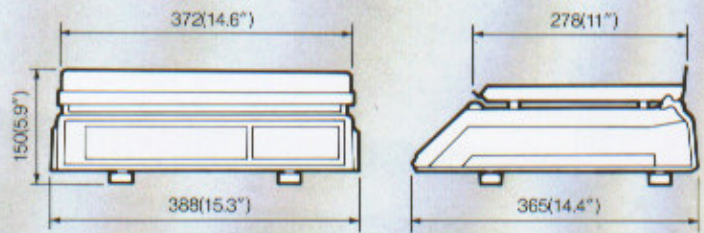

Unit: mm/in



CAS CORP.
Computer And Sensors

CAS (U.S.A) CORPORATION
N.J. OFFICE
99 MURRAY HILL PARKWAY
EAST RUTHERFORD, NEW JERSEY 07073
TEL : (201) 933-9002
FAX : (201) 933-9025

CA OFFICE
4879E. LA PALMA AVE., UNIT 207
ANAHEIM, CA 92807
TEL : (714) 693-1936
FAX : (714) 693-9213



call: 561-582-5510 email: info@cashregisterservices.net

Specifications subject to change for improvement without prior notice.